


Technical Data Sheet

ARO-BOND® 720

ADHESIVE HOTMELT STICKS - HP

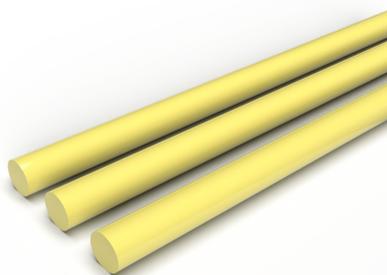

Aro-Bond® 720 high performance hot melt adhesive is especially suitable for quick bonding with manual application systems like hot melt glue guns.

Aro-Bond 720 hotmelt is suitable for use in a wide variety of industries: footwear, upholstery, electronics, packaging, laminated cardboard, wood, etc

BENEFITS

- Medium viscosity
- Good thermal stability
- Medium open time
- High initial grab
- High hot tack
- Good adhesion on difficult substrates.

TECHNICAL DATA

Viscosity:	5,000-6,000 mPas
Application temperature:	160-190°C
Open Time (180°C):	20-25 s
Softening Point (R&B):	90-100 °C

AVAILABLE COLOURS

Yellow

AVAILABLE SIZES

- 1kg Pack
- 10kg Carton

PREPARATION AND APPLICATION

Aro-Bond 720 Hotmelt adhesive is applied using a hot melt gun. The application device must work within the indicated application temperature range: 160-190°C

The humidity of the materials to be joined: 8-10%

The surfaces to be joined must be clean and free of dust or dirt.

HANDLING & STORAGE

Aro-Bond 720 can be stored for at least 2 years from the date of manufacture, stored in a cool (between +5 and +35°C), dry (H R <60%) and ventilated environment, away from direct sunlight, heat sources and ignition points. Avoid frost. Always keep in tightly closed original packaging.

For further information, please request safety data sheet.

DISCLAIMER: Due to the variation in materials likely to be handled by prospective users of this product, together with differences in production techniques and ultimate performance required, it is important that this product is thoroughly evaluated under production and end use conditions before being commercially adopted. Such an evaluation should incorporate an ageing test and this test should be repeated if the substrates on which the this product is used are changed in any way or are purchased from a different source. During the evaluation and testing of the product, it is the purchasers/end user's responsibility to carry out appropriate actions for the protection of the environment, the health and safety of its employees and purchasers of its products. No employee of Ureka Global Ltd has any authority to waive or change the forgoing provisions. The above recommendations are made in good faith for the guidance of users and are without liability. Any queries should be made in writing to the head office of Ureka Global Ltd.

Revision date: December 2024

